


**TORSO BALANCES**

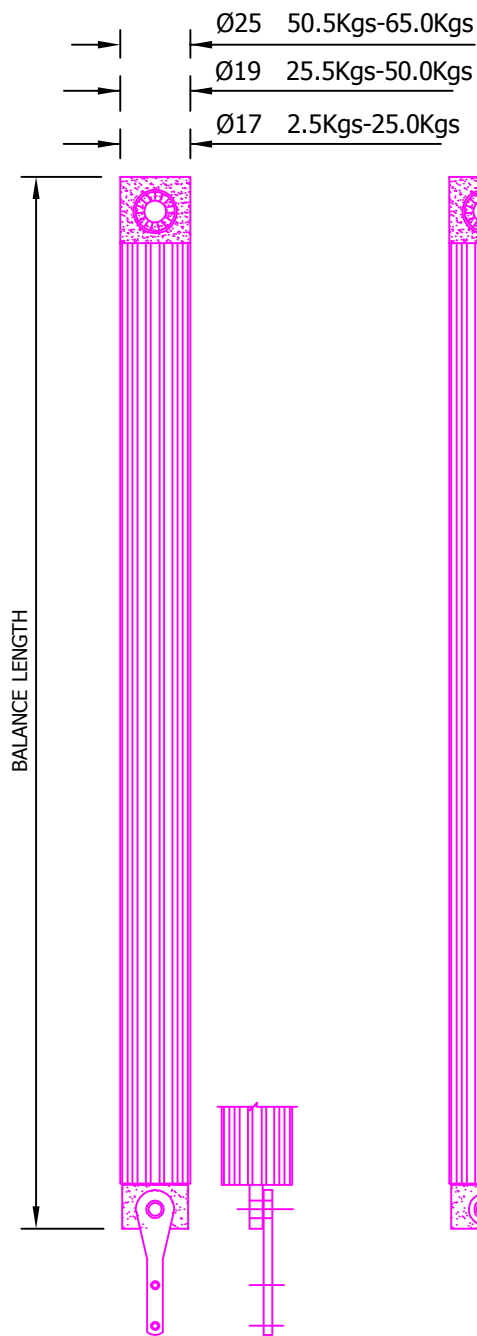

**OPTION '1'**  
 2 Pins for tilt in sash.  
 UK105 Torso link bracket.

**OPTION '2'**  
 For non-tilt sashes.  
 A range of brackets are available. (UK118 illustrated)  
 For further information please consult the Technical Dept. to suit timber or specific system companies profile.

All of the information shown on this data sheet was correct at the time of issue. All information however is subject to change and therefore it is advisable to check with Caldwell Hardware to ensure that you have the latest issue level.

**TORSO BALANCE**

A pre-tensioned double sprung balance specified for its very high reliability and excellent track record. Provides torque-free lift for over 50,000 cycles. Available from 225mm to 1800mm in 25mm increments. 1525mm to 1800mm on extended lead times.

**BALANCE EXTENSION**

$\varnothing 17$  &  $\varnothing 19$  = 2 x Balance length - 100mm  
 $\varnothing 25$  = 2 x Balance length - 150mm  
 (From the top of the balance to the end of the end moulding to which the bracket is attached).

**STANDARD SASH WEIGHT CAPACITY**

4kgs - 40kgs

**NON-STANDARD SASH WEIGHT CAPACITY**

2.5Kgs - 3.5Kgs & 40.5Kgs - 65.0Kgs  
 Prices on application.

**PLEASE NOTE:**

Specials from 50.5kgs - 65kgs can be supplied. (Tube diameter 25mm on extended lead times). Consultation with Technical Dept. is essential before placing orders.

**MATERIALS**

Outer tube: Rigid PVC-U  
 End Moulding: Reinforced nylon  
 Brackets: Stainless steel or corrosion resistant carbon steel.

**COLOURS**

Outer tubes available in grey, brown or white tubes.